APPENDIX B

LINE OF SIGHT/PHOTOMETRIC PLAN

This page intentionally left blank

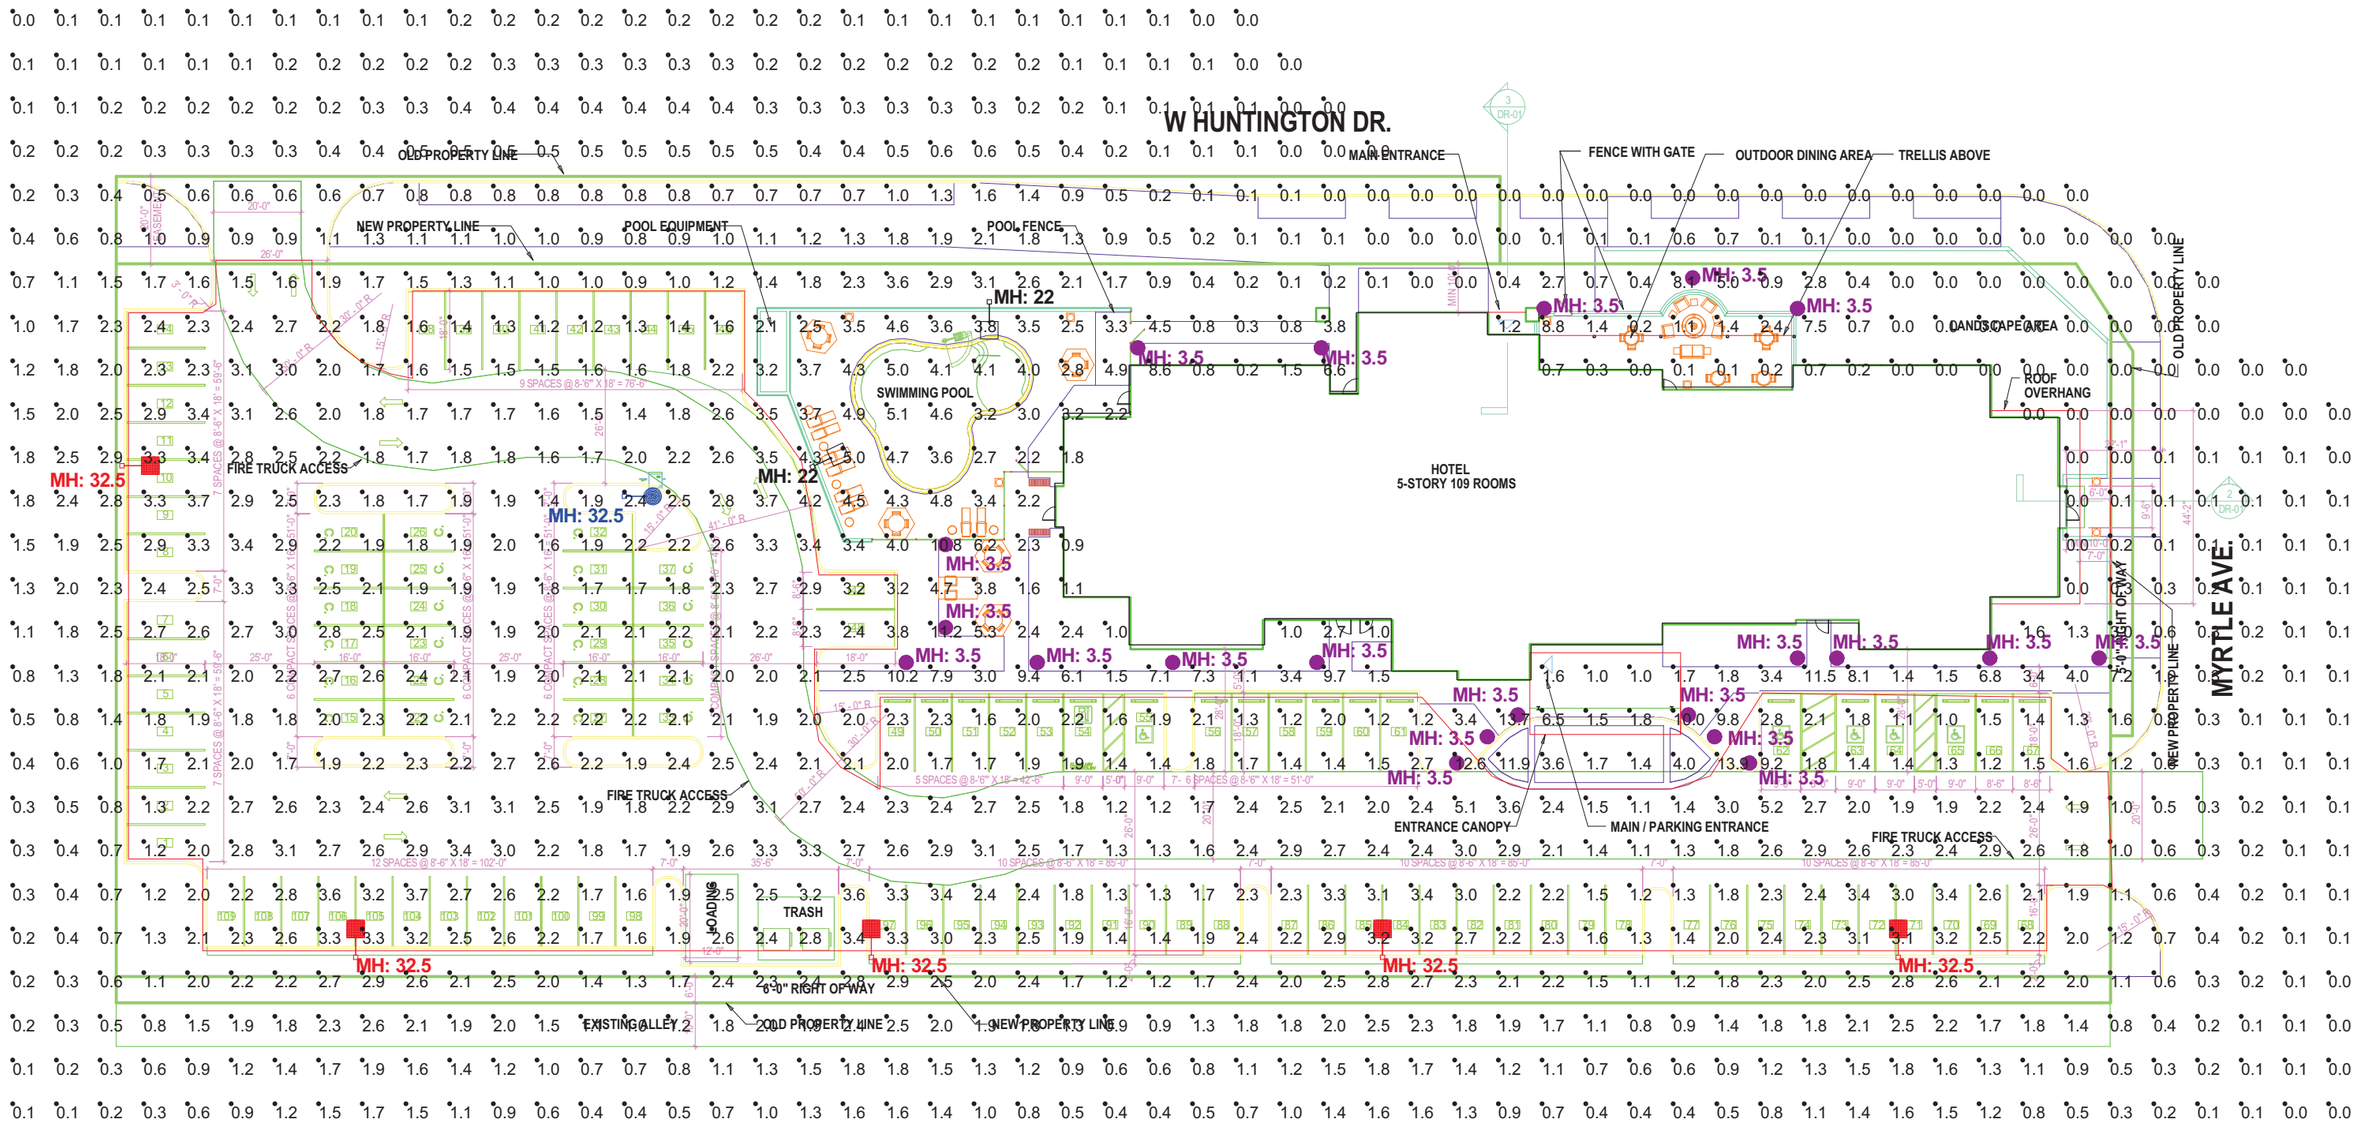

Luminaire Schedule							
Symbol	Qty	Label	Arrangement	Lumens/Lamp	LLF	Description	Lum. Watts
	2	OSQB-4ME	SINGLE	11648	0.930	OSQ-A-NM-4ME-B-57K-xx-xx	86
	5	OSQU-4ME	SINGLE	27103	0.930	OSQ-A-NM-4ME-U-57K-xx-xx	215
	1	OSQU-5SH	SINGLE	26504	1.020	OSQ-A-NM-5SH-U-57K-xx-xx	215
	21	PWY-5M	SINGLE	1730	0.950	PWY-EDG-5M-P4-02-E-UL-xx-350	22

(2) PS4S22C1xx 22' x 4" Square steel poles (no afg base)
(6) PS4S30R1xx 30' x 4" Square steel poles (+2.5' a fg base)
(8) OSQ-DA-xx Direct Mount Brackets
***** Poles meet 110 mph wind zone requirements**
***** OSQ fixtures mounted with no tilt at 22' - 32.5 '**
***** PWY fixtures mounted at 3.5'**

0 60 120

CREE

Lighting Plan